



BASALT RECESSED COVER

B125



DESCRIPTION

Indicated for filling with sidewalk-type pavement or micro-cube, in order to conceal the presence of the cover closing device in the surrounding space.





DRAWINGS

Ref	Model	A1 x A2	H	O1 x O2	h	Class
921031	500	485 x 485	75	400 x 400	50	B125
921032	600	585 x 585	75	500 x 500	50	B125

FEATURES:

- Cover made of spheroidal graphite cast iron (ductile), according to EN-GJS-500-7 EN1563;
- According to EN 124-2:2015, class B125;
- Hydraulic seal to prevent the passage of odors;
- Armed with two handles for lifting the cover;
- Black painting for corrosion protection;
- 50 mm recess

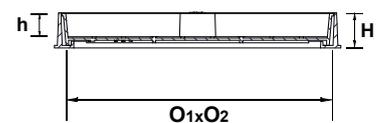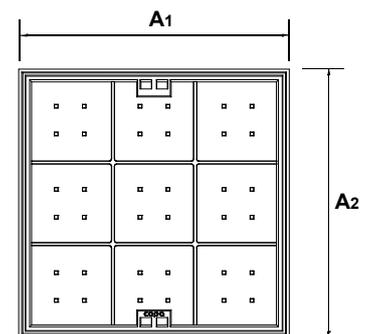

INSTALLATION LOCATION:

Walks, pedestrian zones, gardens and comparable, car parks for light vehicles.