



COVER DOURO

B125




DESCRIPTION

Square closing device in spheroidal graphite casting according to EN 1563 (EN-GJS-500-7).

This device is standardized for class B125, Group 2 of EN 124-2:2015. It is suitable for application on sidewalks, pedestrian zones, comparable areas, car parks for light vehicles, among others.



The rim is fitted with a hydraulic seal to prevent the passage of odors and the cover has non-slip surface relief and black paint against corrosion.

This device is available in a comprehensive range of sizes up to 900x900mm.

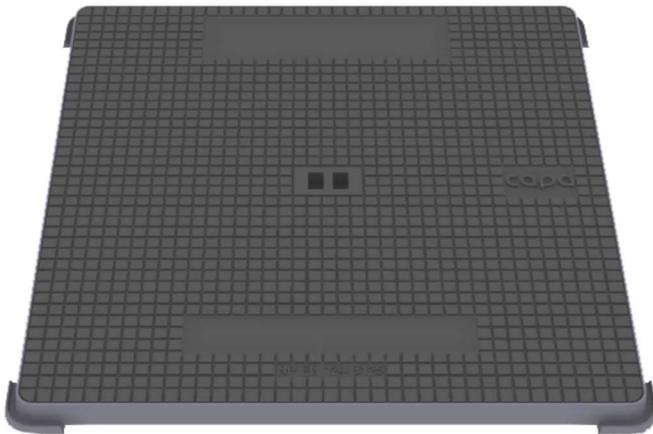

Ref	Model	A1 x A2	O1 x O2	H	Class
920112	400	400x400	300x300	30	B125
920113	500	500x500	400x400	35	B125
920114	600	600x600	500x500	35	B125
920115	700	700x700	600x600	45	B125
920116	800	800x800	700x700	45	B125
920117	900	900x900	800x800	45	B125

DRAWINGS

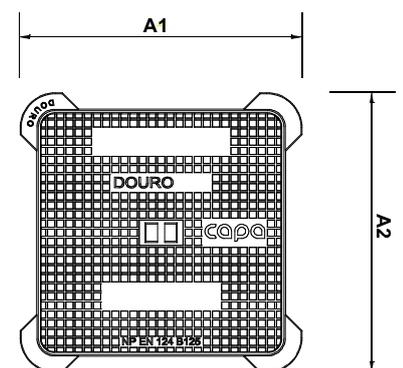

FEATURES:

- Cover in spheroidal graphite cast iron (ductile), according to EN-GJS-500-7, EN 1563;
- According to EN 124-2:2015, load class B125;
- Hydraulic seal to prevent the passage of odors;
- Fitted with two handles for easy lifting of the lid;
- Surface non-slip relief;
- Optimized hoop for laying in the surrounding concrete;
- Black paint for corrosion protection.

INSTALLATION LOCATION:

- Passeios, zonas para peões, jardins e comparáveis, parques de estacionamento para viaturas ligeiras.